


PVC CURVE BELT

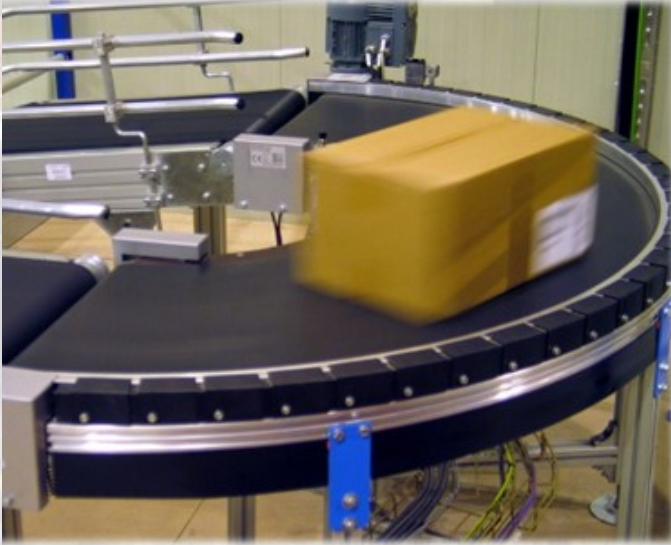


Generalities

They are suitable for transport on curves WITHOUT relative movement of the product with respect to the conveyor. Individualized products (boxes, containers, packages, finished product) with a flat and resistant base, free of protruding elements in the lower part. They allow high speeds with frequent accelerations and stops, at controlled speed.

Technical Data

Steel or Aluminium profiles adjustable legs and frame. The belt is made by PVC/fabric, with manual tensioning system and self-guided system, which slides on a galvanized sheet. Sweep angle with different radius and angle options.

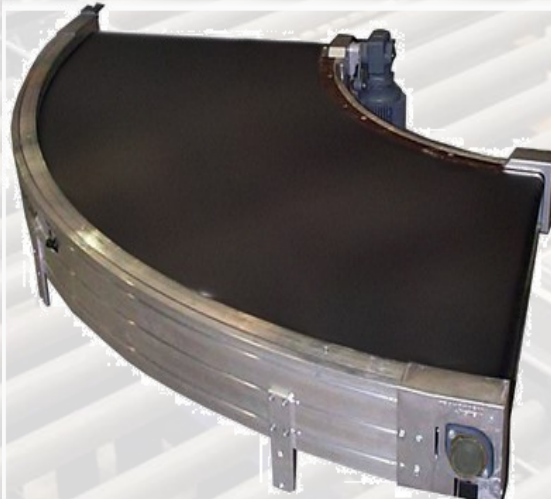

Technical characteristics	Minimum/ Maximum (Also available in different measures)
Product morphology	Regular and irregular (Not spherical or cylindrical)
Product measures	100 x 100 x 10 / 1.200 x 800 x 800 mm
Product weight	100 gr. / 120 Kg.
Load capacity	Until 80 Kg. / m
Conveyor speed	10 / 240 m./min.
Useful width	400 / 1.200 mm
Conveyor angle	30 - 45 - 60 - 90- 135 y 180°
Driving power	0,25 Kw / 2,2 Kw
Driving	Gearmotor
Motorization	Fairing. Head or lower central location.
Noise level	< 65 dB